


**IceCap's Universal Voltage - Model 150-MH**  
**The Most Advanced Ballast You Can Buy**  
 For Any 150-watt MH Bulb You Want to Light

Description		Model
		MH - 150
		120 - V
Lamp		MH-150W
Lamp Spec	Voltage	80 - 105V
	Current	1.6 Amps
Input Voltage		<b>85 - 265V A/C</b>
Input Current		1.5A Max.@ 120V
Input Power		168W
Power Factor		0.95
Total Harmonic Distortion		< 10%
Lamp Current Crest Factor		<1.5
Operating Frequency		70 - 200Hz
Ignition Voltage		4.5KV Max
Starting Time		< 15 seconds
Restarting Time		5 - 6 minutes
Minimum Starting Temp.		-10C
Max. Allowed Area Temp.		<50C
Max. Mounting Distance		6 feet
Open Circuit Protection		yes
Ignition Failure Protection		yes
End of Lamp Life Protection		yes
Flicker		none
Sound Rating		A
Enclosure Overall Dimension - inches		6.54" X 3.96" X 1.63"
Enclosure Overall Dimension - metric		166 x 100.6 x 41.4 mm
Weight		1.3 lbs. / .6 Kg.
Average Ballast Life @ 50C		> 100,000 Hours

**ADVANTAGES**

- \* Energy Savings, 94% Efficient
- \* Provides Constant Light Output Over Lamp's Lifetime
- \* Longer Ballast Life, Cooler Running Electronics Last Longer
- \* Compact Size
- \* Flicker and Noise Free
- \* High Temperature Shutdown with Automatic Reset

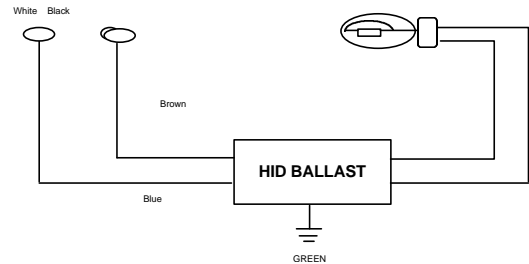

**IceCap, Inc.** 9-B South Gold Drive, Hamilton New Jersey 08691 USA  
 609-588-5338 or toll-free 800-742-3227 fax 609-588-5460 [www.IceCapInc.com](http://www.IceCapInc.com)